

Decathlon Series


Industrial PD Flow Meters

Description

The patented Flow Technology Decathlon Series of industrial in-line flow meters is ideal for a wide variety of liquid flow applications. These applications include, but are not limited to paints, resins, petrochemicals, lubricants, fuels, polyurethanes and adhesives. These flow meters are both highly accurate and easily adaptable to most industrial applications.

Features


- 1/8" to 2" line sizes
- Handles viscosities up to 1,000,000 cP+
- Only two moving parts
- Bearingless design
- Easy to install and maintain
- Reference accuracy $\pm 0.05\%$ of rate
- Up to 1000 psig operating pressure
- Operating temperatures up to 400° F (204° C)
- Wide range of applications
- Non-intrusive sensor
- Up to 1000:1 turndown
- Various process connection types available
- Handles pulsating flow streams

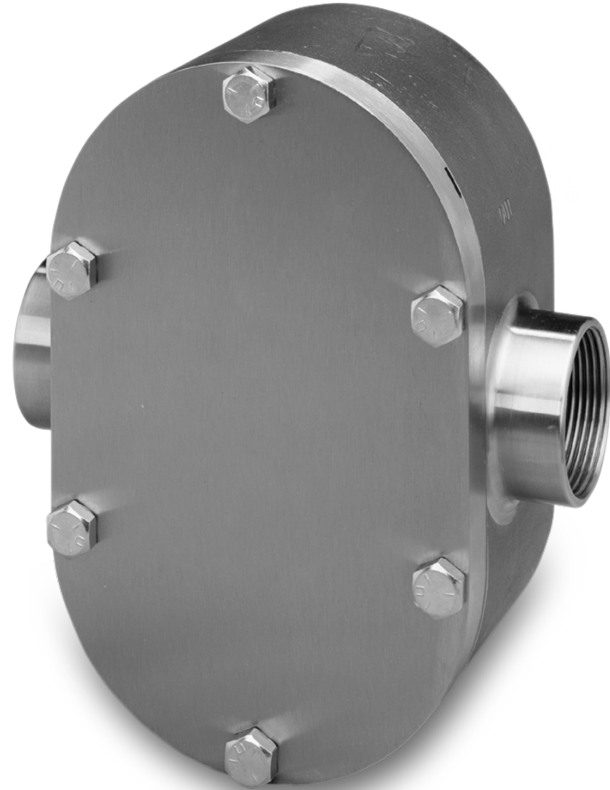

Decathlon Series
Industrial Flow Meters

Protected by one or more U.S. Patents:
4641522, 4815318, 4911010, 4996888, 5027653, 5325715

Principle of Operation

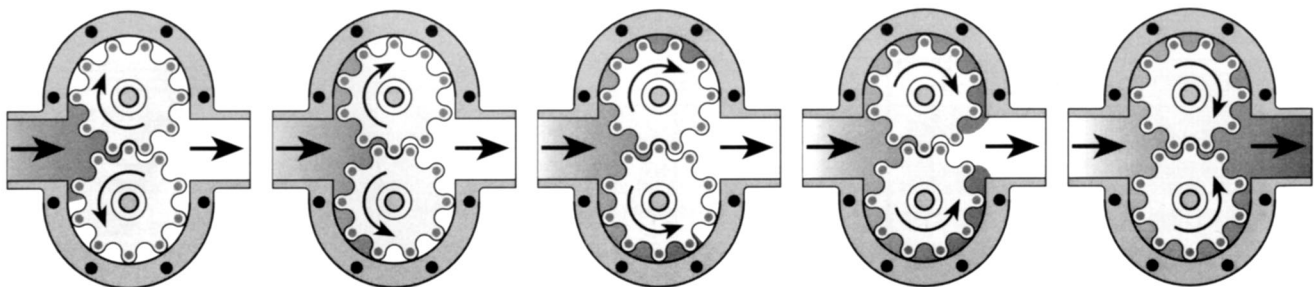


Flow Technology positive displacement flow meters use two rotating impellers driven by the flowing liquid. Magnets imbedded in the impellers activate a non-intrusive sensor which generates a pulsed output signal. Each pulse represents a known volume of liquid that is captured in between the lobes of the impellers. A K-factor converts the pulses into engineering units for remote data collection and digital display.


Decathlon Series Industrial Flow Meters

Flow Meter Assembly Diagrams


DC01I, DC02I

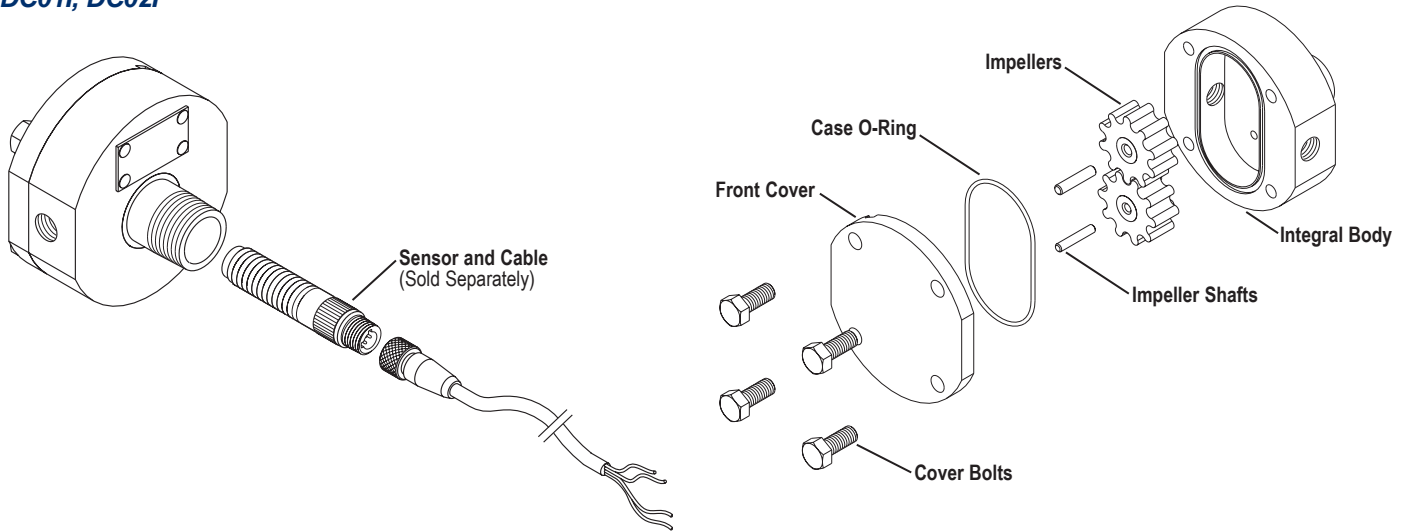

DC05I, DC10I, DC15I, DC20I

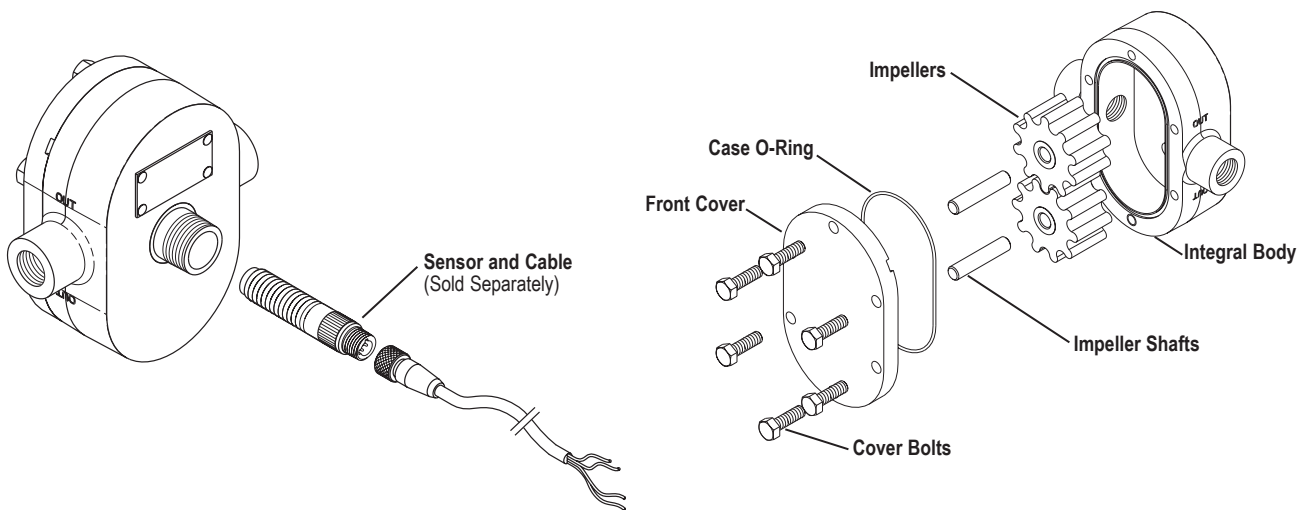

Dimensions

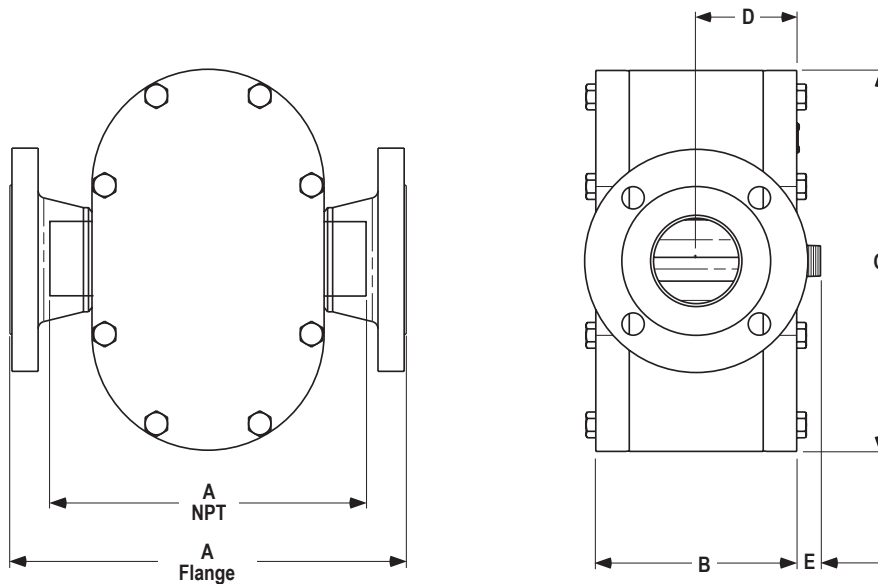

Decathalon Series Industrial Flow Meters

Specifications

Operating Temperature Up to 400° F (204° C)
based on impeller materials

Operating Pressure
Standard 250 psig max. (1724 kPa)
Optional Up to 1000 psig (6895 kPa)

Turndown Ratio
(model's max. rated flow ÷ its minimum flow rate)

Low viscosity fluids 10:1 standard
Medium viscosity fluids 100:1 standard
High viscosity fluids Up to 1000:1

Repeatability
(Reference Accuracy) ±0.05% of rate (repeatability)

Note: Each flow meter is individually calibrated on a ballistic calibrator traceable to NIST in the flow lab on a liquid representing the specific application.

Linearity
Typical ±0.5% of rate over upper 80% of full span
With enhanced signal conditioning Up to ±0.1% of rate over full turndown range

Output
(Refer to individual product sheets for complete specifications)
Sensors

Hall Effect Pickoff: 5–24 VDC square-wave pulse depending on supply, 3-wire

Magnetic Pickoff: 10 mV to 10 V sine-wave pulse depending on flow rate, 2-wire
Explosion-proof optional

Signal Conditioners and Transmitters

Refer to individual product sheets, available from Flow Technology

Materials of Construction

Body (Case) 316 stainless steel, standard
Shafts and Cover 316 stainless steel, standard
Impellers See Model Numbering System
O-Rings Viton™ or Teflon® standard
Bolts and Nuts 316 stainless steel, standard*

***Note:** Intermediate pressure flow meters use zinc plated Grade 8 bolts and nuts; A286 high strength stainless steel optional.

Model Specifications

Basic Model No.	Nominal Size	Maximum Flow Rate		Recommended Mesh Size		Weight			
		Standard Connection	GPM	L/min	Mesh	[Particle Dia.]	NPT		150# RF Flange
						lbs	kg	lbs	kg
DC01I	1/8" NPT	1	3.79	100	[0.006"]	2.1	1.0	-	-
DC02I	1/4" NPT	3	11.40	100	[0.006"]	3.4	1.5	-	-
DC05I	1/2" NPT	12	45.40	80	[0.007"]	8.5	3.9	11	4.8
DC10I	1" NPT	25	94.60	60	[0.009"]	15	6.7	18	8.3
DC15I	1-1/2" NPT	50	189	60	[0.009"]	26	12	32	15
DC20I	2" NPT	100	379	40	[0.015"]	55	25	67	30

Dimensions

Basic Model No.	A (NPT)		A (150# RFF)		B		C		D		E	
	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm
DC01I	2.9	74	-	-	1.1	28	3.0	76	0.5	12	1.10	28
DC02I	3.3	84	-	-	1.4	36	3.5	89	0.6	16	1.10	28
DC05I	5.4	137	7.4	188	2.2	56	5.6	142	1.1	27	0.80	20
DC10I	7.0	178	8.8	224	2.7	69	6.9	175	1.4	35	0.80	20
DC15I	6.9	175	10.0	254	3.4	86	8.2	208	1.7	44	0.80	20
DC20I	9.5	241	11.8	300	4.5	114	10.8	274	2.3	58	0.80	20

Decathalon Series Industrial Flow Meters

Model Numbering System

D **C** **I** - -

Basic Model No.

Nominal Size

- 01 = 1/8"
- 02 = 1/4"
- 05 = 1/2"
- 10 = 1"
- 15 = 1-1/2"
- 20 = 2"

Case Material

- 6 = 316 SS* ✓
- 0 = Specify

Shaft Material

- 1 = 316 SS* ✓
- C = Tungsten Carbide
- 0 = Specify

O-Ring Material

- 1 = Viton™ *
- 2 = Buna-N
- 3 = Chemraz®
- 4 = Kalrez®
- 6 = EPDM
- 9 = Teflon™ ✓
- 0 = Specify

Special Designator

000 = Standard Meter*

Connection Size

- 01 = 1/8"
- 02 = 1/4"
- 05 = 1/2"
- 10 = 1"
- 15 = 1-1/2"
- 20 = 2"
- 00 = Specify

Connection Type

- 1 = NPT (Female)*
- 2 = 150# RF Flange
- 6 = 300# RF Flange
- 0 = Specify

Impeller Style (See Chart)

- 5 = Normal Temperature
- A = Normal Temperature, Grooved +
- 0 = Specify

Impeller Material

- 3 = UHMWPE + ✓
- 5 = PPS
- 9 = PTFE
- 0 = Specify

Impeller Normal Temperature Chart

Impeller Material	Operating Temperature	CIP Temperature
PPS	-20° F to +400° F (-29° C to +204° C)	400° F (204° C)
PTFE	-20° F to +250° F (-29° C to +121° C)	250° F (121° C)
UHMWPE	-20° F to +150° F (-29° C to +66° C)	185° F (85° C)

Key

*	Standard Configuration
✓	FDA Compliant
CIP	"Clean in Place," a brief cleaning cycle
+	Not available in size 01 and 02 meters

Specifications are for reference only and are subject to change without notice.

Material Guide

Name	Description
316 SS ✓	316 Stainless Steel, 316L has reduced carbon
Buna-N	Nitrile
Chemraz ®	Elastomeric PTFE by Greene Tweed
EPDM	Ethylene Propylene
Kalrez ®	Perfluorinated Elastomer, by DuPont™
PPS	Polyphenylene Sulfide, Ryton® by Solvay
PTFE	Polytetrafluoroethylene, Teflon™ by Chemours™ (Impeller)
Teflon ™ ✓	Polytetrafluoroethylene, by Chemours™ (O-Ring Material)
UHMWPE ✓	Ultra High Molecular Weight Polyethylene
Viton ™	Fluorocarbon, by Chemours™

8930 S. Beck Avenue, Ste 107, Tempe, Arizona 85284 USA

Tel: (480) 240-3400 • Fax: (480) 240-3401 • Toll Free: 1-800-528-4225

E-mail: ftimarket@ftimeters.com • Web: www.ftimeters.com

DB 65102 Rev D © 2025 FTI Flow Technology, LLC.

